

ADVANTAGE STRIP 1&2

coating blanket

OFFSET PRINTING BLANKETS

Sawva 


ADVANTAGE STRIP 1 & 2

Blankets designed with stable pre-carcass and optimum compressible layer construction for easy stripping on coating units

APPLICATION INK

Sheetfed	●	UV	●
Heatset	●	Conventional	●
Coldset	●	Hybrid	●
Packaging	●	RECOMMENDED	●
Coating	●	SUITABLE	●
Metal	●	NOT RECOMMENDED	●

STRUCTURE

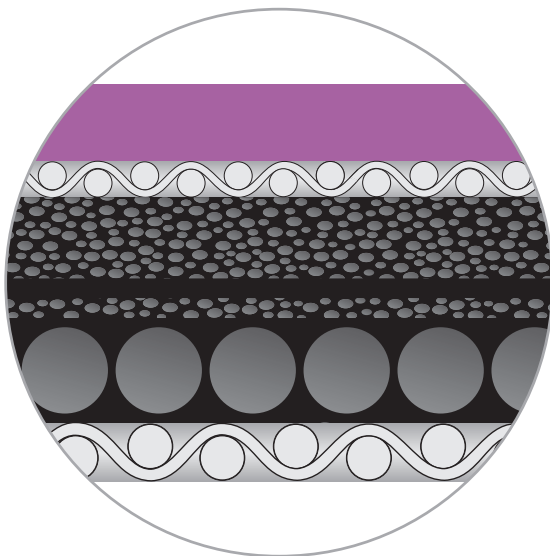

COLOUR	Pink
FACE COMPOUND	Solvent resistant rubber blend
CONSTRUCTION TYPE	Cord Carcass Compressible
SURFACE FINISH	Ground and polished
SURFACE ROUGHNESS, RA	0,60 – 0,90 µm
MICRO HARDNESS	68 +/- 3 IRHD
STRETCH	< 0,70 % at 500 N/5 cm
NOMINAL THICKNESS	1,96 mm (ISO 12636) 1,70 mm (ISO 12636)
MINIMUM STENCIL DEPTH	1,96 mm - 0,90 mm 1,70 mm - 0,80 mm
PEEL STRENGTH	15-25 N/50mm*, 25-40 N/50mm**
BOTTOM LAYER	Water/Solvent sealed
PACKING & TENSIONING	Conform to OEM instructions
	*] Stripping 1
	**] Stripping 2

Printing surface
Fabric ply

Close cell reinforced compressible layer

Cord ply

Sealed bottom fabric

CHARACTERISTICS

Smoothly polished surface

Exceptionally stable pre-carcass ply

Unique carcass

ADVANTAGES

Gives even varnish film thickness with minimum pressure settings and optimum varnish transfer.

Calibrated radial cord pre-carcass adds dimensional stability for precise register and reuse of blanket.

Calibration of each blanket layer ensures deep stencil depth of min 0,90mm for cleaner profiles. Excellent flexibility for easier press mounting. Clean stencil cutting with sharp edges by hand or CAD. Easy peeling for quick, trouble free preparation.



Savatech, d.o.o. • Industrial Rubber Products and Tyres
Škofjeloška c. 6 • 4000 Kranj • Slovenija • Tel + 386 (0)4 206 54 97 • Fax + 386 (0)4 206 64 00
info.print@sava.si • www.savatech.si • www.savaprint.com